



Department of Property & Procurement

Government of the United States Virgin Islands

3274 ESTATE RICHMOND, CHRISTIANSTED, U. S. VIRGIN ISLANDS 00820

8201 SUB BASE, SUITE 4, ST. THOMAS, U. S. VIRGIN ISLANDS 00802

ST. CROIX MAIN OFFICE: 340.773.1561 | ST. THOMAS MAIN OFFICE: 340.774.0828

ST. CROIX FAX: 340.773.0986 | ST. THOMAS FAX: 340.777.9587

[HTTP://DPP.VI.GOV](http://DPP.VI.GOV)



October 13, 2016

AMENDMENT #1 IFB017DOAT16 (C) ABATTOIR ROOF REPAIRS

DELETE:

1. Old Due Date: October 17, 2016 @ 10:00AM
2. Old Bid Schedule and Plans

INSERT:

1. New Due Date: October 18, 2016 @10:00AM
2. New Bid Schedule and Plans

ALL OTHER TERMS AND CONDITIONS REMAIN UNCHANGED

BIDDERS MUST ACKNOWLEDGE RECEIPT OF THIS AMENDMENT WITH THEIR BID PROPOSAL.



**GOVERNMENT OF
THE VIRGIN ISLANDS OF THE UNITED STATES
DEPARTMENT OF PUBLIC WORKS
DIVISION OF ENGINEERING**

Department of Agriculture
Abattoir Roof Repairs - 2016
BID SCHEDULE - Addendum No. 1


No.	DESCRIPTION	UNITS	QTY.	PRICE	TOTAL
1	MOBILIZATION				
a	Includes Insurance, Bonding, Staging of Equipment & Materials	L.S.	1		
2	INTERIOR ROOF				
a	Chip and Repair Spalled Concrete Ceiling with Epoxy Application to Exposed Steel; Finish with Hydraulic Cement	S.F.	1,600		
b	Construct Durock Ceiling Below Interior Concrete Ceiling	S.F.	930		
c	Paint Ceiling Interior	S.F.	1,700		
d	Adjust Electrical Fixtures to Accomodate New Durock Ceiling	L.S.	1		
	Sub Total				
3	EXTERIOR ROOF				
a	Apply Roof Membrane Fabric with Elastomeric Roof Coating as per Manufacturers Specifications <i>*Provide Submittals Prior to Purchasing for Architect's Approval</i>	S.F.	3,800		
4	EXTERIOR CONCRETE RAMP				
a	Demolish Concrete Ramp and Re-build <i>*Reuse Existing</i>	L.S.	1		
5	WINDOWS				
a	Install Approx. Size 24"x30" Miami Aluminum Louver Shutter Windows to Match Existing <i>*Verify Window Openings prior to Ordering Windows</i>	L.S.	5		
GRAND TOTAL					
Prepared by:		Date			

2"x8" PRESSURE TREATED WOOD CONTINUOUS, W/ 5/8" DIA. 5" LONG BOLT @ 4' O.C. EPOXY GROUTED INTO SLAB

REPAIRED CONCRETE CEILING

1/2" DUROCK CEMENT BOARD

2"x8" PRESSURE TREATED WOOD CONTINUOUS, W/ (2)-5/8" DIA. 5" LONG BOLTS @ 4' O.C. EPOXY GROUTED INTO SLAB, STAGGERED

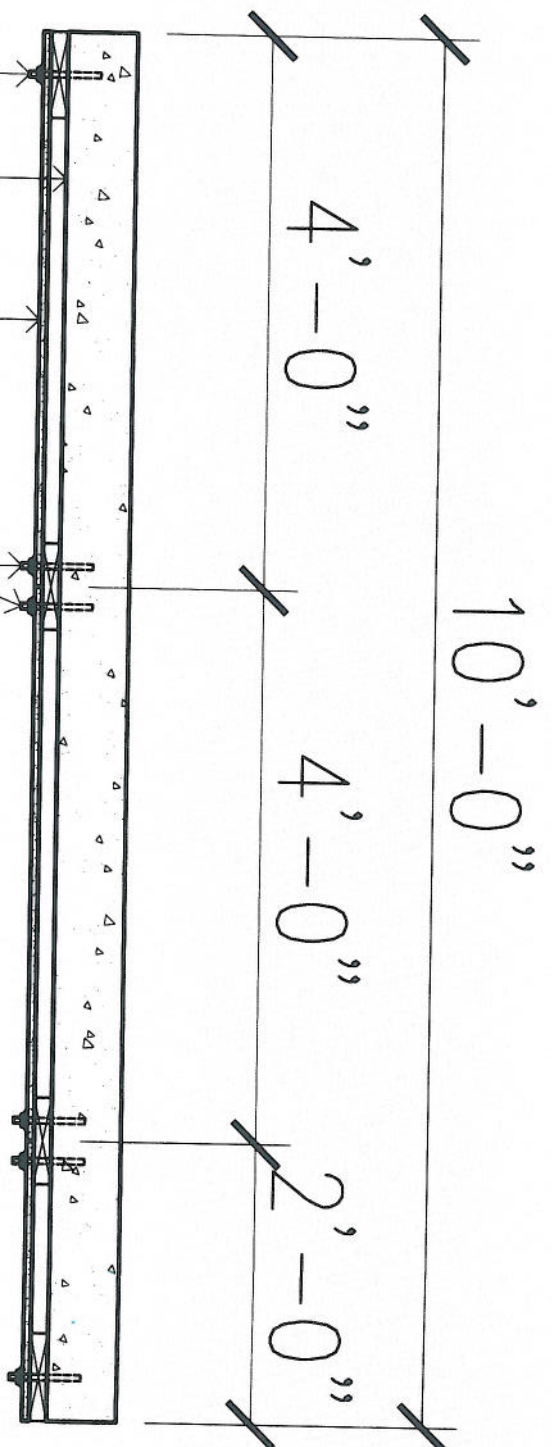

DRAWN BY: JERMAINE McCLEAN, DPW

DATE: OCTOBER 2016

CEMENT BOARD TO CEILING ATTACHMENT DETAIL

SCALE: $\frac{3}{4}" = 1'-0"$