



# Department of Property & Procurement

Government of the United States Virgin Islands

3274 ESTATE RICHMOND, CHRISTIANSTED, U. S. VIRGIN ISLANDS 00820

8201 SUB BASE, 3RD FLOOR, ST. THOMAS, U. S. VIRGIN ISLANDS 00802

ST. CROIX MAIN OFFICE: 340.773.1561 | ST. THOMAS MAIN OFFICE: 340.774.0828

ST. CROIX FAX: 340.773.0986 | ST. THOMAS FAX: 340.777.9587

[HTTP://DPP.VI.GOV](http://DPP.VI.GOV)



April 18, 2016

**AMENDMENT #1 IFB004DPWT16 (C)** Qualified Contractors to furnish all labor, tools, equipment, machinery and supply for the Moravian Highway Pavement Rehabilitation Route 30-Project No. VI-0030 (039) on St. Thomas, Virgin Islands.

INSERT: *Questions and Answers*

**Bid Schedule**

ALL OTHER TERMS AND CONDITIONS REMAIN UNCHANGED

BIDDERS MUST ACKNOWLEDGE RECEIPT OF THIS AMENDMENT WITH THEIR BID PROPOSAL.

**ADDENDUM #1 – IFB-004-DPW-T-2016(C)**

**Project No. VI-30(39) Moravian Highway Pavement Rehabilitation - St Thomas**

**Response to bidder's questions:**

1. What is the minimum percentage of work that the general contractor has to complete with his own work force?

Response: The successful bidder must perform not less than 50% of the work with his own forces. See General Provisions section 34. (a).

2. Does the Bonding Company need to be Treasury Listed?

Response: No, see instructions, number 2, on page O-8 and O-10 of the contract book.

**Clarifications:**

1. Note number 3 under the schedule of quantities on sheet 2 of the plan set:

The 8' height of the palm trees refers to the trunk size. The trunk of the palm trees shall be 8' in height measured from soil to beginning of the fronds.

2. Add the following under Landscape Improvements – Irrigation System, Installation, page T-25, 2. Excavating and Backfill:

Work under this item shall include all required excavating, backfilling, saw cutting, and pavement / minor concrete restoration related to the installation of the irrigation system.

3. Add the following under Landscape Improvements – Irrigation System, Installation, page T-25, 3. Piping:

Work under this item shall include all required piping from the WAPA water main, located under route 30, related to the installation of the irrigation system.


**Attached are the following sets of pages that replace pages in the original Bid Package.**

1. Revised Bid Schedule - Page D-4.

**Decrease Quantity:** Item 60101-0000, Minor Concrete, extend Existing Wall, 110 CY

2. Sheet 9 – Wall Detail replaced with sketch SK-1

ISLAND	PROJECT	SHEET NUMBER
STT	VI-30(39)	SK-1

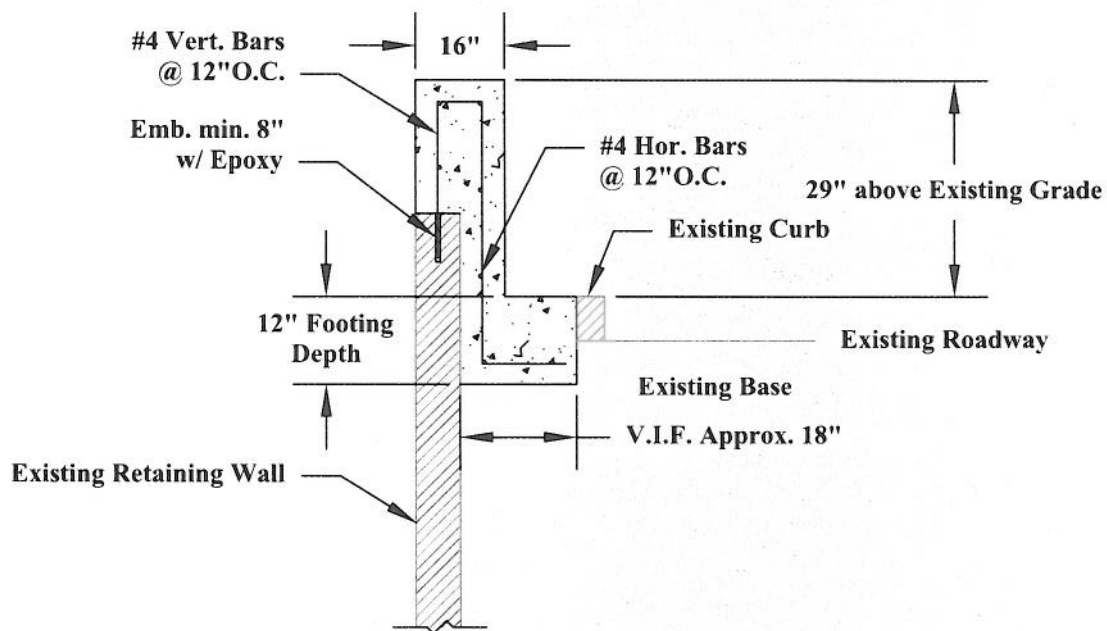

### **TYPICAL WALL DETAIL**

Stations 12+00 to 17+00 (approx.)

Right & Left

(not to scale)

This Sketch Modifies Sheet 9

VI DEPARTMENT OF PUBLIC WORKS  
OFFICE OF HIGHWAY ENGINEERING

**MORAVIAN HIGHWAY - ROUTE 30**  
**PAVEMENT REHABILITATION**  
WALL DETAIL

**PROJECT NO. VI-0030(039)**

ITEM NO.	APPRX. QUANT.	ITEM AND UNIT PRICE BIDS(IN WORDS)	UNIT PRICE DOLLARS/CENTS	ITEM NO. DOLLARS/CENTS
30102-0800	3115 SY	AGGREGATE BASE, 8", GRADING D _____ _____		
40301-0200	706 TON	HOT ASPHALT CONCRETE PAVEMENT, GRADE B, 4" _____ _____		
40301-0400	3455 TON	HOT ASPHALT CONCRETE PAVEMENT, GRADE D, 2" _____ _____		
41301-0600	15000 SY	ASPHALT PAVEMENT MILLING, 2" _____ _____		
60101-0000	110 CY	MINOR CONCRETE, EXTEND EXISTING WALL _____ _____		
60101-1000	20 CY	MINOR CONCRETE, CURB & SIDEWALK REPAIRS _____ _____		