


| EXISTING EQUIPMENT LIST |   |
|-------------------------|---|
| 1                       | EXISTING SERVICE LINE (16'-11"X25"DEEPX48.5" HIGH)<br>LOCATED IN AREA OF NUMBERING SYMBOL |
| 2                       | WARMING OVEN ( 24" w X28" deep X 71" height)  |
| 3                       | OVEN (38"WX33"DPX66 ½" HGHT)  |
| 4                       | EXISTING KETTLE (38 ½" dia. X v48 ½"height)   |
| 5                       | EXISTING PREP TABLE ( 9'-0"long X 2'-6" deep X 32 ½" hgt)                                 |
| 6                       | S. STEEL CART ON CASTERS W/SHELVES (35 ½"wX21"XdpX36" hgt)                                |
| 7                       | S. STEEL CART ON CASTERS W/SHELVES (24 ½"w X 18 ½" DP X 35" H)                            |
| 8                       | WIRE FRAME STORAGE ( 60"w X 24" dp X74"h )  |
| 9                       | PLASTIC SHELVING/ STORAGE ( 35"w X 24" dp X72"h )   |
| 10                      | S.STEEL DOUBLE SINK (73"w X 21" dp X36"h )  |
| 11                      | S.STEEL DOUBLE SINK (73"w X 21" dp X36"h )  |
| 12                      | EXISTING EXHAUST HOOD   |
| 13                      | STAINLESS STEEL SINGLE SINK   |
| 14                      | EXISITING TILTING SKILLET (48"w X34" deep X39 ½" HGT)                                     |
| 15                      | EXISITING MIXER (30"w X30" deep X 56 ½" HGT)  |
|                         |   |

DEMOLITION NOTES


1. CONTRACTOR TO REMOVE AND LEGALLY DISGARD ALL EXISTING EQUIPMENT AS NOTED ON THE EXISTING LAYOUT AND PREP AREA TO RECEIVE NEW EQUIPMENT TO BE SUPPLIED BY DOE.
2. CONTRACTOR TO REMOVE EXISTING DOOR AND HARDWARE W/ NEW TO MATCH EXISTING OR BETTER
3. CONTRACTOR TO REMOVE PLEXI GLASS PANEL AND REBUILD W/ NEW WOOD STUD AND CEMENT BOARD OR WATER RESISTANT DRYWALL AND FINISH TO MATCH EXISTING
4. EXISTING FREEZER DOOR AND COOLER DOOR TO BE REFURBISHED AND DOOR SEALS TO BE REMOVED AND REPLACED.
5. REMOVE EXISTING FLOOR AT COOLER AND PREPARE AREA TO REPLACE WITH NEW PRE FABRICATED INSULATED FLOOR AS NOTED ON CONSTRUCTION PLAN
6. CONTRACTOR TO REMOVE THE LOWER SHEET ROCK SHEATHING UP TO 4'-0" HIGH AT BOTH SIDE AND REPLACE WITH DURO ROCK SHEATHING, FINISH AND PAINT TO MATCH EXISTING WITH NEW RUBBER BASEBOARD.
7. CONTRACTOR TO REMOVE EXISTING FIRE SUPPRESSION SYSTEM AT EXHAUST HOOD AND PREPARE TO REINSTALL A NEW FIRE SUPPRESSION SYSTEM FROM AMEREX CORPORATION
8. REMOVE EXISTING WOOD COUNTER AT DISH RETURN AND INSTALL NEW STAINLESS STEEL SURFACE OR SOLID SURFACE (4"Wx 3.0'D)OR APPROVED EQUAL AS SPECIFIED
9. REMOVE EXISTING SCREENED WINDOW AND PREPARE AREA TO RECEIVE NEW WINDOW (SEE WINDOW SCHEDULE)
10. CONTRACTOR TO EXCAVATE AREA AND PREPARE AREA TO POUR A NEW FOUNDATION AND SLAB FOR BLDG. TO ACCOMODATE NEW PROPANE TANKS FOR GAS LINE AND NEW PROPOSED EQUIPMENT
11. CUT EXIST. SLAB & PREPARE AREA TO ACCEPT NEW 1 ½" BLACK STEEL PIPING (FOR NEW GAS LINE ENCLOSED BY 2 ½" SCHEDULE 80 PVC HOUSING) IN ACCORDANCE WITH NFPA CODES AND LOCAL BUILDING CODES FOR NEW GAS LINE FROM BLDG. TO KITCHEN.

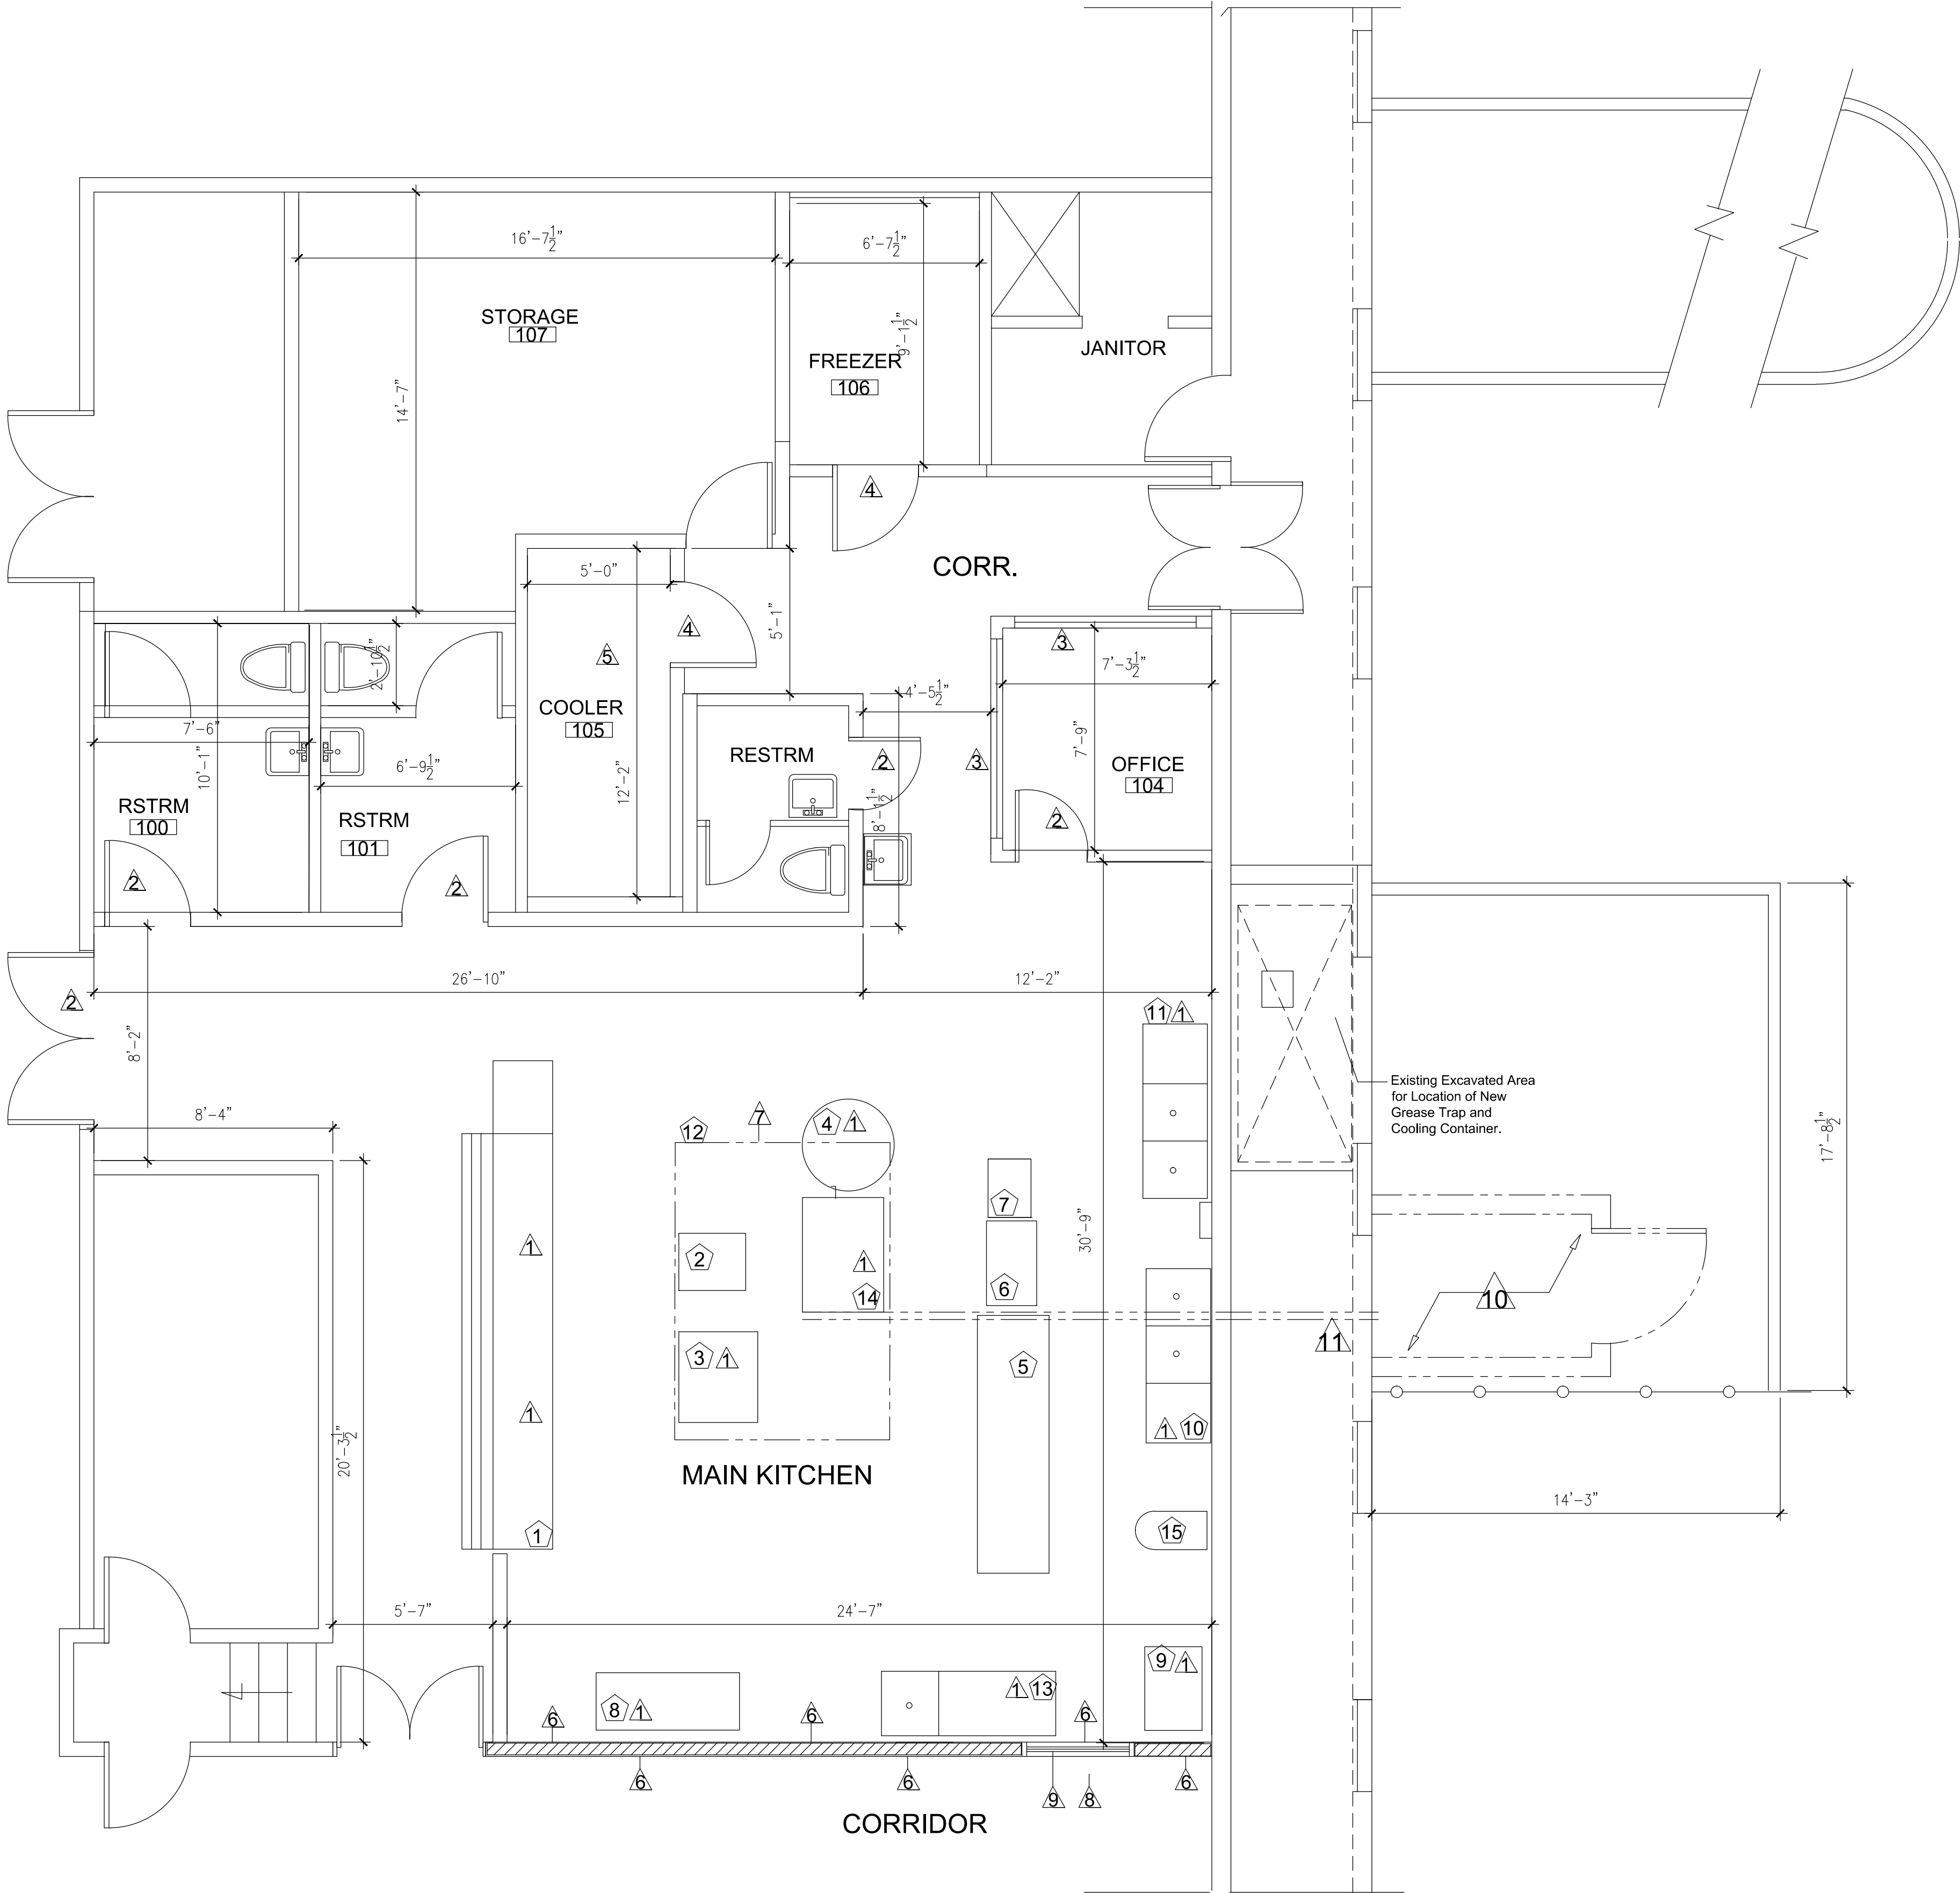

| REVISIONS |      |
|-----------|------|
| NO.       | DATE |
|           |      |
|           |      |
|           |      |
|           |      |
|           |      |
|           |      |
|           |      |

| EXISTING EQUIPMENT LAYOUT AND NOTES  |  |
|--|--|
| E. BENJAMIN OLIVER ELEMENTARY SCHOOL<br>148-325 PALMETTO ROAD<br>ST THOMAS U.S. VIRGIN ISLANDS 00802 |  |

|               |              |
|---------------|--------------|
| DRAWN BY:     | LD           |
| CHECKED BY:   | E. BLAIZE    |
| APPROVED BY:  | E. BLAIZE    |
| CONTRACT NO.: | CONTRACT.NO. |
| PROJECT NO.:  | PROJ.NO.     |
| DATE:         |              |

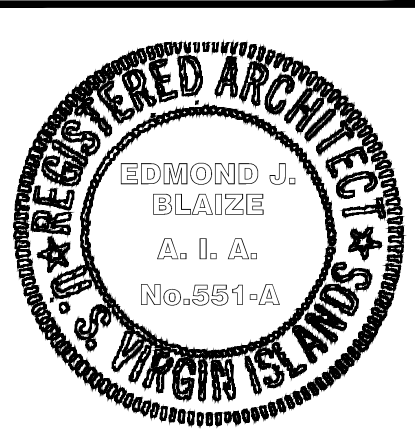

|                         |          |
|-------------------------|----------|
| SHEET NO.:              | EX EQ1.0 |
| SHEET NO. # OF # SHEETS |          |