


NOTE: THIS DRAWING IS A GRAPHIC REPRESENTATION OF THE EXISTING CONDITIONS. THE CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS, QUANTITIES AND CONDITIONS ETC.

NOTES:

- CONTRACTOR SHALL REMOVE ALL ROCK, LOOSE METAL, DEBRIS, FASTENERS, DERELICT PARTS, PLANTS OR TREES ETC. FROM EXISTING ROOF AND VACUUM SMALL METAL FRAGMENTS ETC. PRIOR TO POWER WASHING.
- CONTRACTOR SHALL NOT ALLOW ANY CLEANING AGENT OR CONTAMINATED WATER TO ENTER ANY CISTERNS OR WATER STORAGE TANKS DURING THE POWER WASHING PROCESS. MEANING ALL RAIN LEADERS CONNECTED TO ANY CISTERNS OR WATER STORAGE TANKS SHALL BE DISCONNECTED OR PLUGGED PRIOR TO CLEANING THE ROOF.
- CONTRACTOR SHALL REMOVE ALL FLUID MEMBRANE THAT WAS APPLIED ON TOP OF EXISTING SINGLE PLY MEMBRANE. AND REPAIR IDENTIFIED SECTIONS AS PER ROOFING MANUFACTURER'S SPECIFICATIONS.
- CONTRACTOR WILL BE HELD RESPONSIBLE FOR DRAINING AND CLEANING ANY CISTERN AFFECTED BECAUSE OF NEGLIGENCE AND REFILL SAID CISTERN WITH CLEAN DRINKING WATER AFTER ALL ROOF REPAIR HAS BEEN COMPLETED.
- CONTRACTOR SHALL REPAIR ALL VISIBLE CUTS, PUNCTURES & DELAMINATED SECTIONS OF EXISTING SINGLE PLY MEMBRANE AS PER MANUFACTURER'S SPECIFICATION THEN POWER WASH APPROXIMATELY 13,110 SQUARE FEET OF EXISTING ROOF & PARAPET SURFACE AREA, THEN INSPECT EVERY SQUARE INCH OF THE ROOF & PARAPET FOR ANY OTHER DEFECTS IN THE SINGLE PLY MEMBRANE, TO INCLUDE PUNCTURES, CUTS, DELAMINATED SECTIONS, ETC.
- CONTRACTOR SHALL MARK OR IDENTIFY ALL DAMAGED, PUNCTURED OR DELAMINATED AREAS UPON DISCOVERY OF SAID AREAS.
- CONTRACTOR SHALL HIRE QUALIFIED AND CERTIFIED ROOFING CONTRACTORS TO UNDERGO ALL NECESSARY REPAIRS AS PER ROOFING MANUFACTURER'S SPECIFICATIONS.
- CONTRACTOR SHALL INSPECT ALL EXISTING PATCHES AND SEAMS FOR ANY DEFECTS OR SEPARATIONS AND REPAIR AS PER ROOFING MANUFACTURER'S SPECIFICATIONS.
- CONTRACTOR SHALL INSPECT ALL ROOF DRAIN CONNECTIONS BOTH ABOVE AND BELOW EXISTING ROOFING ASSEMBLY, ASSURING THAT ALL EXISTING CONNECTIONS ARE SECURE AND FREE FROM DEFECTS. UPON DISCOVERY OF ANY DEFECTS CONTRACTOR SHALL REPAIR SAID CONNECTIONS, PIPING, ROOF DRAIN ETC. AS NECESSARY TO PREVENT ANY LEAKS.
- CONTRACTOR SHALL REPLACE ALL DAMAGED ROOF DRAIN SCREENS, STRAINERS OR DOME TO MATCH EXISTING OR BETTER.
- CONTRACTOR SHALL INSPECT AROUND ALL ROOF PENETRATIONS SUCH AS AIR CONDITION PIPING, PVC ROOF VENTS, EXHAUST VENTS ETC. FOR ANY DEFECTS IN EXISTING SINGLE PLY MEMBRANE OR SEALANT AND REPAIR ANY SUCH DEFECTS AS PER ROOFING MANUFACTURER'S SPECIFICATIONS.
- CONTRACTOR SHALL INSPECT EXISTING SINGLE PLY MEMBRANE ON ALL RAISED SURFACES AND AROUND ANY ROOF OPENING FOR ANY DEFECTS IN THE EXISTING SINGLE PLY MEMBRANE. UPON DISCOVERY OF ANY DEFECTS, SUCH AS CUTS, PUNCTURES, DELAMINATION, ETC. THE CONTRACTOR SHALL REPAIR AS PER ROOFING MANUFACTURER'S SPECIFICATIONS.
- CONTRACTOR SHALL REPAIR ANY SECTION OR PART OF ANY ROOFING MEMBRANE DAMAGED OR DELAMINATE CAUSED BY POWER WASHING.
- CONTRACTOR SHALL REMOVE AND PROPERLY DISPOSE DAMAGED OR STAINED ACOUSTIC CEILING TILES AND REPLACE WITH NEW IN KIND TO MATCH COLOR, TEXTURE, SIZE AND PATTERN AS IDENTIFIED IN SCOPE OF WORK SHEET.
- CONTRACTOR SHALL REMOVE ALL EXISTING METAL PIPE SUPPORTS AND REPLACED WITH NEW CADDY PYRAMID SUPPORT BY ERICO COMPANY OR APPROVED EQUAL
- ROOFING CONTRACTOR SHALL HAVE A PULL TEST PERFORMED ON ALL ROOF SUBSTRATES TO ENSURE THAT WIND UP LIFT REQUIREMENTS ARE MET.
- AIR CONDITIONING MECHANICAL CONTRACTOR SHALL REMOVE DISPOSED OF SPECIFIED DAMAGED OR NON FUNCTIONING AIR CONDITION ROOF TOP UNIT(S) AND REPLACE IN KIND; IN TONNAGE, WEIGHT, VOLTAGE, AMPERAGE, COMPATIBILITY OF INSTALLATION IN EXISTING A/C ROOF CURB OPENING AND LISTED MANUFACTURE OR APPROVED EQUAL.

CONTRACTOR SHALL INSPECT ALL TERMINATION BARS AND SEALANT AROUND ALL EQUIPMENT CURBS, WALLS, PARAPET, VENTILATION PIPES, AND EXHAUST FANS. AND REPLACE OR REPAIR THOSE AREAS AS REQUIRED TO STOP OR PREVENT FUTURE LEAKS. (typical)

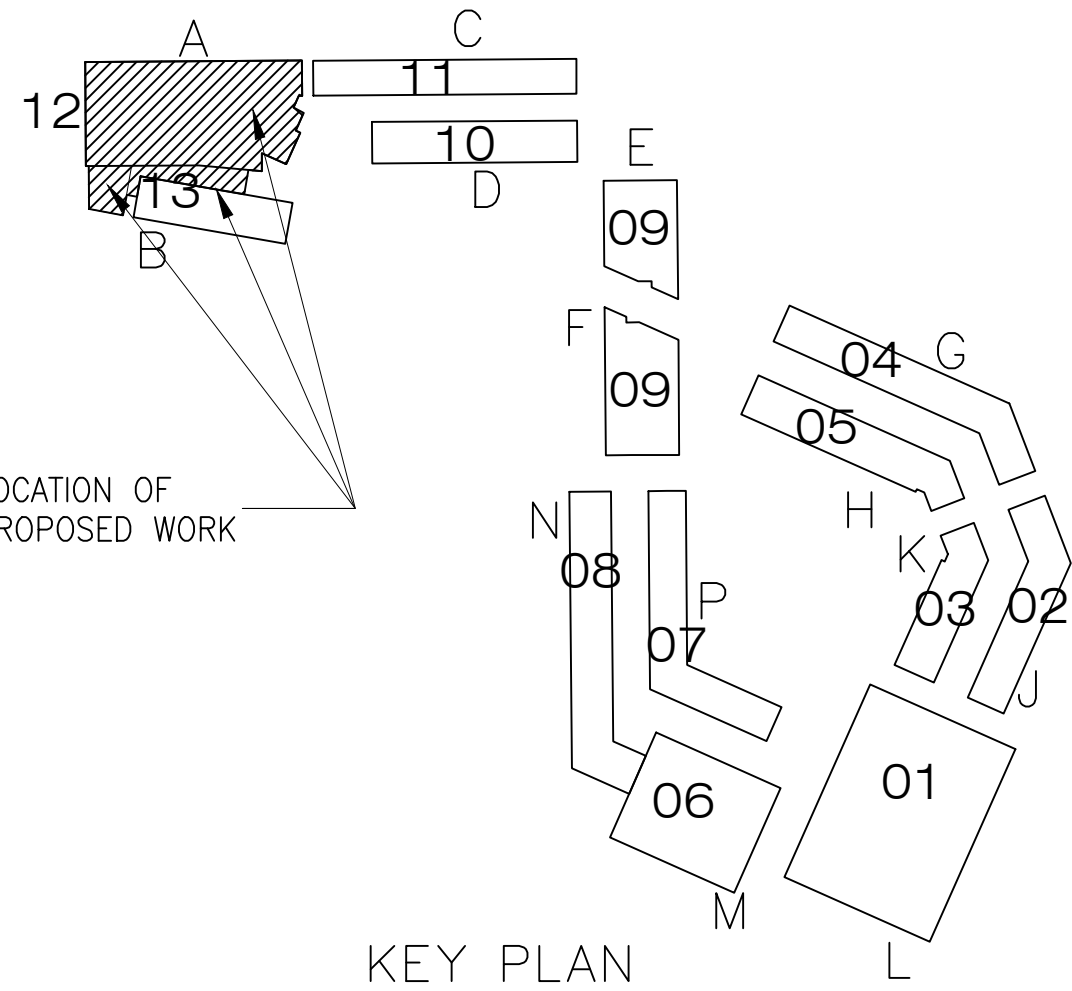

PROJECT I.D	VI0100500
OIA Building Number	12
SOW Building Identification No.	191355,190908, 190728 & 190859
PHYSICAL DESCRIPTION	AUDITORIUM BUILDING: A

BERTHA C. BOSCHULTE MIDDLE SCHOOL