

NOTES

1. CONTRACTOR SHALL ACQUIRE AND INSTALL 6FT. HIGH HEAVY DUTY CHAIN LINK FENCING WITH 2" DIAMETER GALVANIZED PIPING WITH BOTTOM AND TOP RAILS AND CAPS ON THE POST. PIPES SHALL BE BURIED 3 FT. MINIMUM INTO THE GROUND AND CEMENTED WITH CEMENT TO THE GROUND SURFACE TO FILL THE HOLE.
2. THE FENCING SHALL BE INSTALLED WITH FOUR (4) 6FT WIDE DOUBLE GATES WITH SECURE LATCH SETS FOR THE INSTALLATION OF HEAVY DUTY PADLOCK.
3. CONTRACTOR SHALL ALSO PURCHASE AND INSTALL THE SAME TYPE OF FENCING NOTED ABOVE AROUND THE PERIMETER OF THE RETENTION POND WITH ONE (1) 6FT WIDE DOUBLE SWING GATE AS NOTED ABOVE.

10FT. WIDE HARD SURFACE WALKWAY COMPRISED OF SOIL STABILIZER "BASE SEAL WITH 2" DIA. GRAVEL COMPACTED INTO THE TOP OF TREATED "BASE SEAL" SOIL WITH A SMALL VIBRATORY ROLLER & RETAINED ON BOTH SIDE BY 30" REINFORCED CONCRETE CURB.

NEW 6FT. HIGH HEAVY DUTY CHAIN LINK FENCING

6FT HIGH CHAIN LINK FENCE (TYP)

⊙ TRACK CURVE
N 836908.26
E 1202848.43

EXISTING ATHLETIC TRACK AND INFIELD

⊙ TRACK CURVE
N 836924.09
E 1203181.14

10FT. WIDE HARD SURFACE WALKWAY COMPRISED OF SOIL STABILIZER "BASE SEAL WITH 2" DIA. GRAVEL COMPACTED INTO THE TOP OF TREATED "BASE SEAL" SOIL WITH A SMALL VIBRATORY ROLLER & RETAINED ON BOTH SIDE BY 30" REINFORCED CONCRETE CURB.

NEW 6FT. HIGH HEAVY DUTY CHAIN LINK FENCING

NEW 6FT. HIGH x 6FT. WIDE HEAVY DUTY CHAIN LINK FENCING DBL. GATES

10FT. WIDE HARD SURFACE WALKWAY COMPRISED OF SOIL STABILIZER "BASE SEAL WITH 2" DIA. GRAVEL COMPACTED INTO THE TOP OF TREATED "BASE SEAL" SOIL WITH A SMALL VIBRATORY ROLLER & RETAINED ON BOTH SIDE BY 30" REINFORCED CONCRETE CURB.

REINF CONC. PAVED WALKWAY (TYP.)

EXISTING GRASSED SLOPED AREA

PROPOSED TEMPORARY PARKING TO BE DEVELOPED BY THE GOVERNMENT
APPROX. 166 PARKING SPACES

N87°12'03"E
705.34'

REINF CONC. PAVED WALKWAY (TYP.)

TEMPORARY GRAVELED ROADWAY (TYP.)

NEW "DANT CLAYTON" POWDER COATED ALUMINUM "ALUMA STAND BLEACHERS W/ ENCLOSED 12'X40' ENCLOSED GRANDSTAND AREA (TO BE LIKE THE GRANDSTAND ON BROCHURE FOR SPRING HILL SCHOOL). BLEACHERS TO HAVE FULLY CLOSED DECKING (COLOR- MAROON).
- BLEACHERS SHALL BE INSTALLED AS PER MANUFACTURERS SPECIFICATIONS FOR SAFE AND SECURE INSTALLATION AND OCCUPATION

291' WIDE X 40' FT LONG ENCLOSED GRAND STAND

10 ROW BLEACHER STANDS TO ACCOMMODATE APPROX. 1500 PERSONS


NEW PAVED REINFORCED CONCRETE WALKWAY IN FRONT OF BLEACHERS 10FT WIDE X 500 FT LONG

NEW 3.5FT. HIGH HEAVY DUTY CHAIN LINK FENCING SECURELY BOLTED TO TOP OF EXIST. RETAINING WALL W/ TIE BACK SECURED AT EVERY POST AND ANCHORED WITH CONCRETE INTO THE GROUND

NEW 6FT. HIGH HEAVY DUTY CHAIN LINK FENCING

AREA OF NEW CONCESSION AND BATHROOM BUILDINGS AS WELL AS THE REINF. WALKWAY THAT LEADS FROM THE BLEACHERS TO THE NEW BUILDINGS

NOTE
1. SEE DRAWING C-2 FOR ACTUAL DIMENSIONS FOR THE WALKWAY AND SURROUNDING AREA

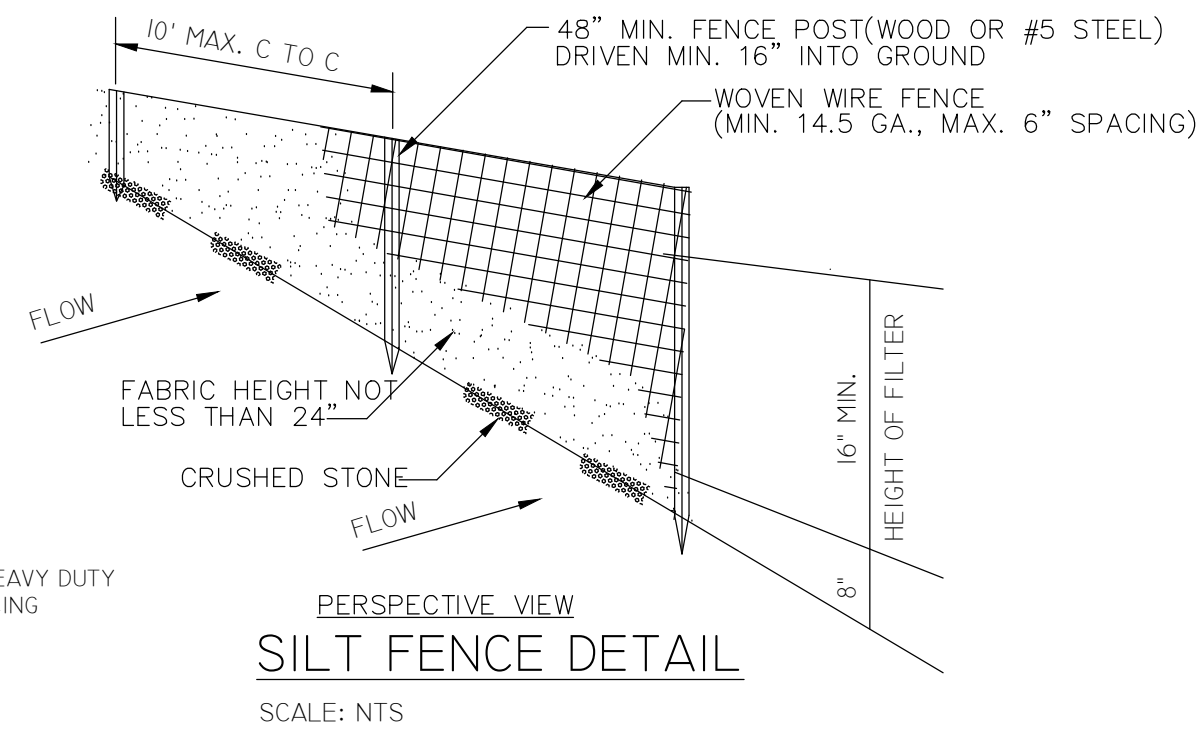


NEW 6FT. HIGH x 6FT. WIDE HEAVY DUTY CHAIN LINK FENCING DBL. GATES

EXISTING GRASSED SLOPED AREA

30"W v 6" THK REINFORCED CONCRETE CURB

5PCS. #3 CONTIN. w/ "L" SHAPED #3's @ 8" O.C. (TYP.)

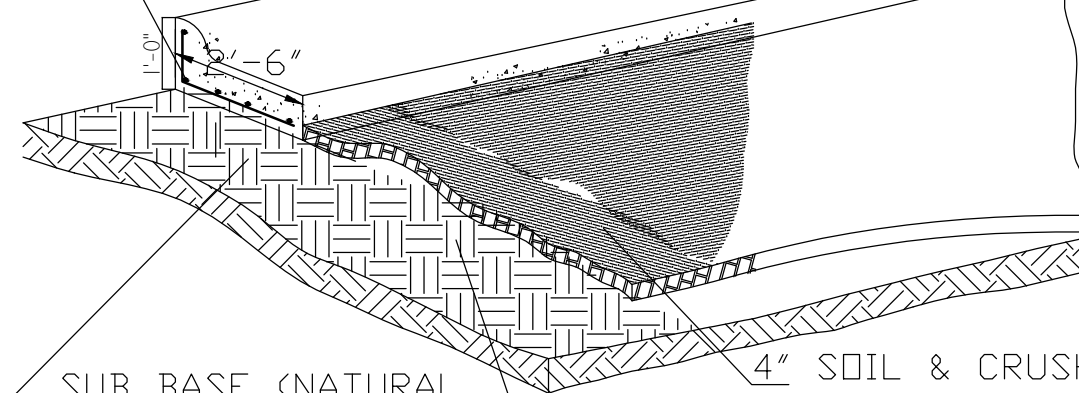

LIGHT DUTY PAVEMENT SECTION

N 836545.53
E 1203397.88

SITE PLAN LAYOUT
SCALE: $\frac{1}{32}$ " = 1'-0"

REVISIONS

NO.	DATE	REMARKS

SITE PLAN LAYOUT

PROPOSED BATHROOM AND CONCESSION BUILDINGS
FOR: IEKHS TRACK & FIELD ATHLETIC FACILITY
OWNER: VIRGIN ISLANDS DEPARTMENT OF EDUCATION
No. 172 ESTATE NAZARETH, NO.1 RED HOOK QUARTER, STT USV

DRAWN BY:

EJB

CHECKED BY:

EJB

APPROVED BY:

EJB

CONTRACT NO.:

CONTRACT NO.

PROJECT NO.:

PROJ. NO.

DATE:

SHEET NO.:

C-1

SHEET NO. # OF # SHEETS

